


Eclipse™ Micro Variable Optical Attenuators

High-speed attenuation control with modulation capability

Boston Applied Technologies' Micro Variable Optical Attenuator (μ VOA) is a voltage controlled optical variable attenuator. Based on the patented proprietary OptoCeramic® technology platform, the Eclipse™ μ VOA provides high speed, high dynamic range, low insertion loss, low polarization dependence loss and the best reliability in a very compact package. The device also enables polarization independent modulation of an optical signal traveling over standard single mode fiber while simultaneously maintaining a specified level of attenuation.

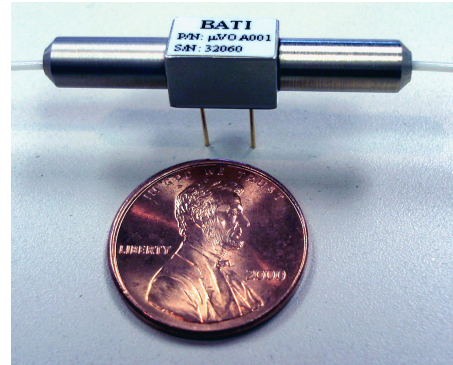

Features

- Precise, high-speed attenuation control
- Excellent optical performance
- All solid-state construction in a compact rugged package
- Superb temperature stability
- Meets or exceeds Telcordia GR1221, GR910, and GR1209 specifications
- Enables polarization insensitive modulation up to 1MHz

Applications

- Channel Equalization/pre-emphasis
- Optical amplification
- Instrumentation
- Wavelength tagging or supervisory channel encoding (using modulation function)

Key Optical Specifications

Attributes ^{1,2}	Performance	
	μVOA001	μVOA002
Wavelength ³	1530-1565, 1570-1610 nm	1530-1565, 1570-1610 nm
Insertion Loss	≤ 0.9 dB	≤ 0.6dB (≤ 0.4 dB, A version)
Dynamic Range	≥ 20 dB	≥ 25 dB
Spectral Flatness @ 15 dB Attenuation	0.5 dB max. 0.3 dB typical	0.1 dB typical ⁴
Polarization Dependent Loss @ 1550nm and 15dB Attenuation	0.5 dB maximum 0.3 dB typical	0.1 dB typical ⁴
Response Time (Full Range) ⁵	< 30 μs	< 30 μs
Attenuation Resolution	Continuous	Continuous
Input Power	≤ 500 mW	≤ 500 mW
Return Loss	≥ 55 dB	≥ 55 dB
Modulation Rate	≤ 1 MHz	≤ 1 MHz
Modulation Depth ⁶	0.5 dB typical	0.5 dB typical
Operating Temperature Range	0°C to 70°C	0°C to 70°C
Storage Temperature Range	-40°C to 85°C	-40°C to 85°C
Dimensions (L x W x H)	35 x 6.5 x 6 (mm)	35 x 6.5 x 6 (mm)

Notes:

1. Unless otherwise specified, all measurements are at 25°C.
2. Normally opaque at zero applied voltage for μVOA001, normally transparent at zero applied voltage for μVOA002.
3. 1310nm and other wavelength also available.
4. For applications attenuating a single wavelength utilizing BATi's feedback circuit. Contact BATi for special multi-wavelength μVOA002.
5. Devices with less than 5μs are also available.
6. Measured at 3 dB attenuation with a 20V sinusoidal signal at 150 kHz.

Contact Information

For more information about BATi' leadership in variable optical attenuation and modulation technology and other optical networking modules and components, visit our website at www.bostonati.com.

To obtain additional technical information or to place an order for this product, please contact us at:

Phone: 1-781-935-2800
Fax: 1-781-935-2860
E-mail: sales@bostonati.com